

# FLO EASY FIBC DISCHARGER

The Flo Easy Discharger is designed for the efficient and economic discharge of materials having free to medium flow properties with 15° or 40° hoppers to suit the material type. It handles a wide range of bag types from single trip, flat bottomed, to multi trip outlet spouted with or without liners.



## FLO EASY STANDARD FEATURES

- **FORK LIFT OR HOIST LOADED ARRANGEMENTS**
- **LOAD TESTED FIBC RIGGING FRAME**
- **WITH OR WITHOUT DUST CONTROL MEMBRANE AND DUST EXTRACTION PORT**
- **WITH OR WITHOUT VIBRATION FACILITY TO ASSIST MATERIAL DISCHARGE**
- **SIX BLADED KNIFE FOR FLAT BOTTOMED BAGS**
- **OPERATOR ACCESS DOOR FOR UNTYING THE BAG OUTLET SPOUT**
- **WITH OR WITHOUT PATENTED LINER TENSIONING SYSTEM**

## FLO EASY OPTIONS



- **VOLUMETRIC FEEDERS**
- **BATCH / CONTINUOUS LOSS IN WEIGHT SYSTEMS**
- **LOW HEADROOM ARRANGEMENT - DE-MOUNTABLE FLT LOADING**
- **INTEGRAL 25KG SACK TIP HOPPER**
- **DUST COLLECTOR**
- **HAZARDOUS AREA/ATEX MODELS**
- **IBC OR OCTABIN DISCHARGE ARRANGEMENTS**
- **BAG CLOSURE FLO CHOKE DEVICE**


## ADVANTAGES

- EASY TO USE, ONE MAN OPERATION
- DISCHARGES A WIDE VARIETY OF MATERIALS AND BAG DESIGNS
- COMPACT - MINIMUM FLOOR SPACE
- EASY / QUICK INSTALLATION
- LOW MAINTENANCE

## TECHNICAL SPECIFICATION

### FIBC (Big Bag): lined or unlined

Seam height:	To suit application
Base:	Up to 980mm square standard
Loops:	Corner or cross corner
Capacity:	Up to 2000 kg standard
Discharge rate:	Typically up to 10 bags / hour

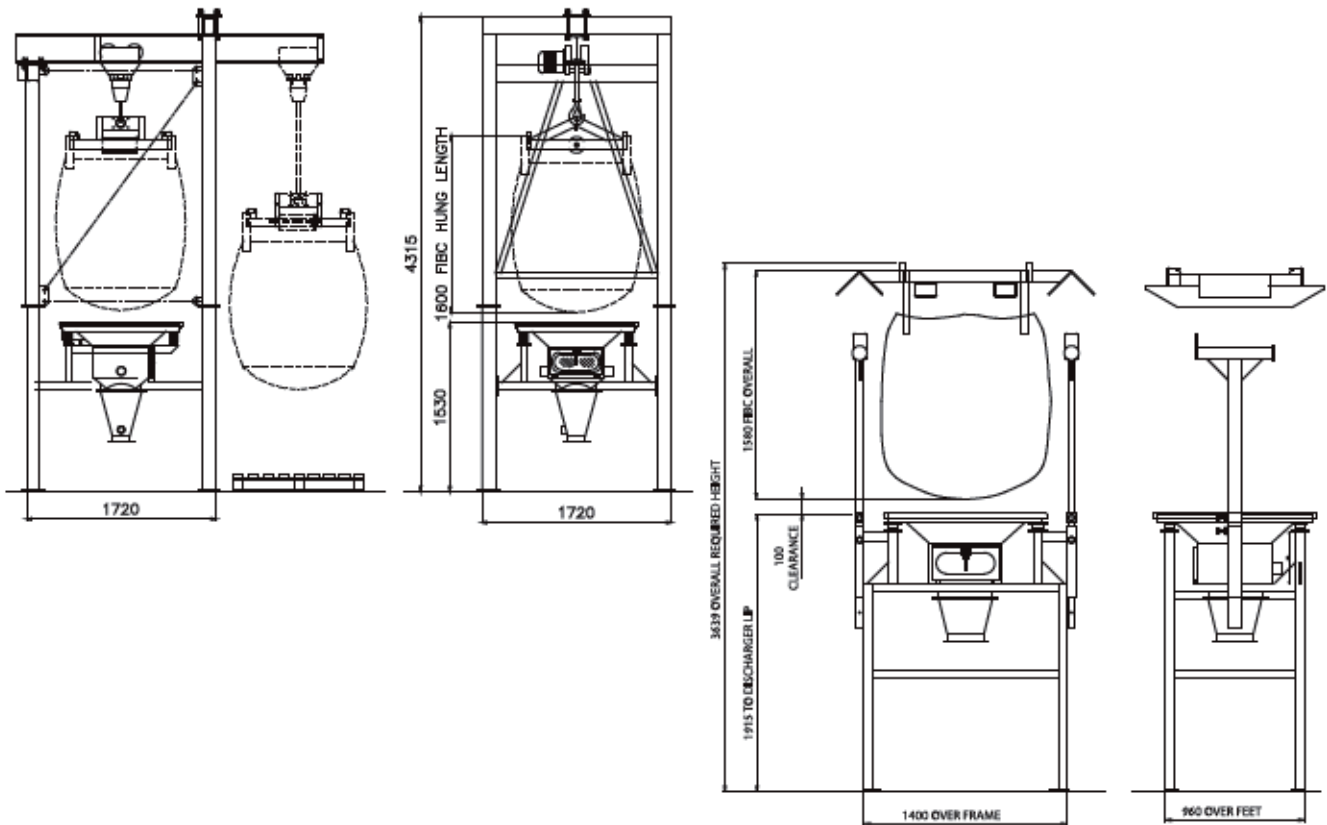

## GET IN TOUCH

T +44 (0)161 477 4775  
 F +44 (0)161 474 0257  
 E sales@fpegroup.co.uk

[WWW.FPEGLOBAL.COM](http://WWW.FPEGLOBAL.COM)